

Shelf Bracket Installation Guide

Contents



Shelf bracket
x1



No 10x50 screws
x2



No 6x19 screws
x2



Wall plugs
x2



Plugs
x2

Tools required

- Spirit level
- Drill
- Screwdriver
- Tape measure
- Pencil
- Appropriate safety equipment
i.e. Safety glasses

We recommend using a qualified tradesman for installation

Step 1 – Safety

Use a wire/pipe power detector to ensure that there are no electrical cables or water pipes where you intend to install the shelf.


Step 2 – Vertical positioning of shelves

Use a tape measure and spirit-level to mark the vertical position for your shelf bracket with a pencil. Your mark should be for the top and bottom of the shelf bracket.

Step 3 – Draw a line level

Use the spirit level and a pencil to draw a perfectly horizontal line along the area of the wall where you intend to mount the shelf. If your spirit level has a measure on it, draw the line to the full length of the shelf. If not, use a tape measure and redraw the line until it is the same length as the shelf.

Step 4 – Mark positions

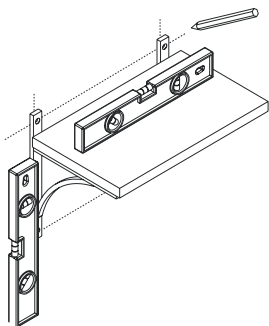

Decide where to position the shelf brackets and mark these positions on your horizontal line. Focusing on one bracket at a time, place the top of the shelf bracket up to the horizontal line and centre on your positioning mark. Keeping the shelf bracket perfectly still, use a pencil to mark the screw holes on the wall.

Repeat this as required for each shelf bracket.

Step 5 - Drill into the wall


Drill into the walls at the centre point of your screwhole markings. Drill the holes deep enough into the wall to fully accommodate the wall plugs.

Step 6 - Insert wall plugs

Insert the wall plugs into the drilled holes. Ensure that the wall plugs are fully inserted and they sit flush to the wall – tap gently with a hammer if necessary. If any of your wall plugs are sticking out, they will prevent your bracket from sitting flush to the wall when mounted.


Step 7 - Fit shelf brackets

Screw the shelf brackets to the wall using a screwdriver and No 10x50 countersunk screws.

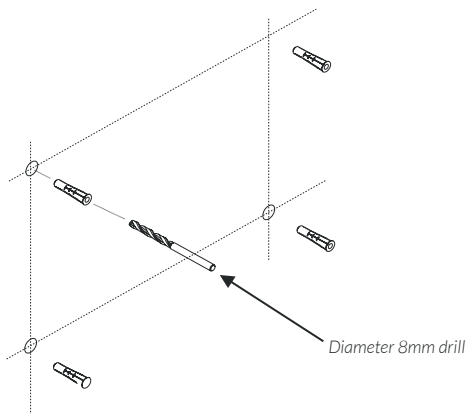

Step 8 - Fix shelf to brackets

Position the shelf to the supporting brackets and ensure it is level, sitting central on the brackets. Use a screwdriver and No 6x19 countersunk screws to fix brackets to the underside of shelf. Alternatively, you can fit the plugs provided if you wish to bond the shelf to the bracket.

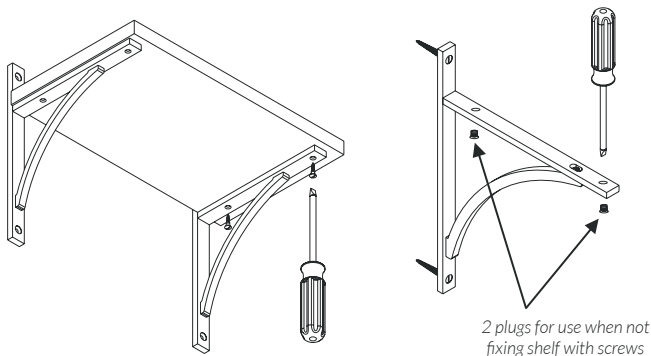

To maintain your solid brass shelf brackets we recommend:

- Wiping the product down with a soft dry cloth as and when required
- Avoiding the use abrasive cleaners or harsh polishes



@armacmartin | armacmartin.co.uk | sales@armacmartin.co.uk